

SAIL RITES BENGAL WAGON INDUSTRY PRIVATE LIMITED (SRBWIPL)
(A Joint Venture Company of SAIL and RITES)
CIN : U352000DL2010PTC211955
Regd Office: Scope Minar, Laxmi Nagar, New Delhi – 110092
Admin Office & Works: Kult, Dist: Paschim Bardhaman, W.B, PIN: 713343
e-mail address: purchase.srbwipl@gmail.com

No. SRBWIPL/Corrigendum/R2 Shed/187/23-24/01

Date 21st December, 2023

Corrigendum-1


Sub: Corrigendum to the tender for extension of shed by 30 meters at SRBWIPL Factory, Kult.

Ref: i) Tender No. SRBWIPL/R2 Shed/187/23-24/01, Dated 16.12.2023

With reference to the tender mentioned above the following corrigendum is issued as per the discretion of the competent authority.

Sl No	As per tender	To be read as
1	Tender Document Fee Rs. 10,000	Tender Document Fee Rs. 1,000

For SAIL RITES Bengal Wagon Industry Pvt. Ltd.


(Navneet Kr. Jha)
DGM/Purchase

SAIL RITES BENGAL WAGON INDUSTRY PRIVATE LIMITED (SRBWIPL)
(A Joint Venture Company of SAIL and RITES)
CIN : U35200DL2010PTC211955
Regd Office: Scope Minar, Laxmi Nagar, New Delhi - 110092
Admin Office & Works: Kulti, Dist: Paschim Bardhaman, W.B, PIN: 713343
e-mail address: purchase.srbwipl@gmail.com

No. SRBWIPL/Corrigendum/R2 Shed/187/23-24/02
Date 3rd January, 2024

Corrigendum-2

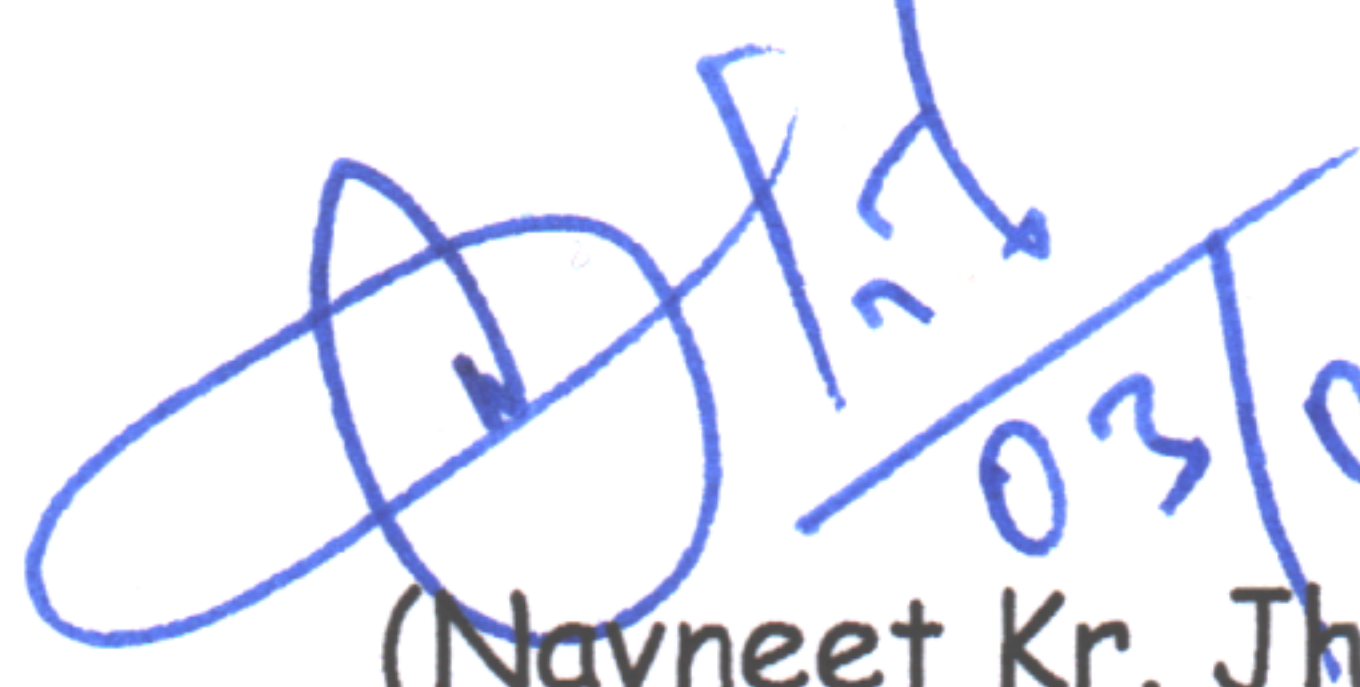
Sub: Corrigendum to the tender for extension of shed by 30 meters at SRBWIPL Factory, Kulti.

Ref: i) Tender No. SRBWIPL/R2 Shed/187/23-24/01, Dated 16.12.2023
ii) Corrigendum No. SRBWIPL/Corrigendum/R2 Shed/187/23-24/01, Dated 21.12.2023

With reference to the tender mentioned above the following corrigendum is issued as per the discretion of the competent authority.

Sl No	As per tender	To be read as
1	Last Date & Time of Submission of bid: By 12.00 PM on 06.01.2024 Date & Time for opening of techno-commercial bid: At 12:30 PM on 06.01.2024	Last Date & Time of Submission of bid: By 12.00 PM on 08.01.2024 Date & Time for opening of techno-commercial bid: At 12:30 PM on 08.01.2024

For SAIL RITES Bengal Wagon Industry Pvt. Ltd.


(Navneet Kr. Jha)
DGM/Purchase

SAIL RITES BENGAL WAGON INDUSTRY PRIVATE LIMITED (SRBW IPL)
(A Joint Venture Company of SAIL and RITES)
CIN : U35200DL2010PTC211955
Regd Office: Scope Minar, Laxmi Nagar, New Delhi - 110092
Admin Office & Works: Kulti, Dist: Paschim Bardhaman, W.B, PIN: 713343
e-mail address: purchase.srbwipl@gmail.com

No. SRBW IPL/Corrigendum/R2 Shed/187/23-24/03
Date 3rd January, 2024

Corrigendum-3

Sub: Corrigendum to the tender for extension of shed by 30 meters at SRBW IPL Factory, Kulti.

Ref: i) Tender No. SRBW IPL/R2 Shed/187/23-24/01, Dated 16.12.2023
ii) Corrigendum-I: SRBW IPL/Corrigendum/R2 Shed/187/23-24/01, Dated 21.12.2023
iii) Corrigendum II: SRBW IPL/Corrigendum/R2 Shed/187/23-24/02, Dated 03.01.2024


With reference to the tender mentioned above the following corrigendum is issued to modify the Scope of Work (Annexure-I) and Price Bid Format (Annexure-II).

Sl. No.	As per tender	To be read as
4	<p>Brick Soiling Providing and laying Single fly ash/jhama bricks flat soiling of bricks including ramming and dressing bed to the proper level and filling joints with local sand</p>	<p>Brick Soiling Providing and laying Single layer 1st class red chimney/jhama bricks flat soiling of bricks including ramming and dressing bed to the proper level and filling joints with local river sand</p>
5A	<p>RCC Work Providing and laying in position ready mixed or site batched design mix cement concrete for reinforced cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana / Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard the setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering, finishing and reinforcement as per direction of the engineer-in-charge; for the following grades of concrete. Concrete of M25 grade with a minimum cement content of 330 kg /cum. Note: Extra cement up to 10% of the minimum specified cement content in the design mix shall be payable separately. In case the cement content in the design mix is more than 110% of the specified minimum cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement.</p>	<p>RCC Work Providing and laying in position ready mixed or site batched design mix cement concrete for reinforced cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana / Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard the setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering, finishing and reinforcement as per direction of the engineer-in-charge; for the following grades of concrete. Concrete of M25 grade with a minimum cement content of 330 kg /cum. Note: Extra cement up to 10% of the minimum specified cement content in the design mix shall be payable separately. In case the cement content in the design mix is more than 110% of the specified minimum cement content, the contractor shall have the discretion to either re-design the mix or bear the cost of extra cement. (Laboratory testing is in vendor scope and testing reports have to be submitted during site work.)</p>
5B	<p>Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing & reinforcement - All work up to plinth level 1:1.5:3 (1 cement: 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources)</p>	<p>Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing & reinforcement - All work up to plinth level: 1:1.5:3 (1 cement: 1.5 coarse sand (zone-III) derived from natural sources: 3 graded stone aggregate 20 mm nominal size derived from natural sources). (Laboratory testing is in vendor scope and testing reports have to be submitted during site work.)</p>

W 176
03/01/2024

Sl. No.	As per tender	To be read as
6A	<u>Reinforcement</u> Reinforcement with Tor steel/Mild steel for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc. including supply of rods, initial straightening and removal of loose rust if required, application of rust remover (Rearm Russ Remover Or Equivalent) on the entire of Tested area of TMT prior to rebuilding using new bar to required length, washing out thoroughly; cutting to requisite length, hooking, bending to correct shape, placing in position and binding with 16 gauge black Annealed at every intersection complete as per direction of executing authority at all floors. The rate is inclusive of all materials, chemicals, labors, tools, tackles, consumable and any other incidental charges all complete.	<u>Reinforcement</u> Reinforcement with Tor steel/Mild steel for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc. including supply of rods, initial straightening and removal of loose rust if required, application of rust remover (Rearm Russ Remover Or Equivalent) on the entire of Tested area of TMT prior to rebuilding using new bar to required length, washing out thoroughly; cutting to requisite length, hooking, bending to correct shape, placing in position and binding with 16 gauge black Annealed at every intersection complete as per direction of executing authority at all floors. The rate is inclusive of all materials, chemicals, labors, tools, tackles, consumables and any other incidental charges all complete. (TATA/SAIL make TMT bar of Fe 500 D.)
12	Structural steel work riveted, bolted or welded in built up sections, column, trusses and framed work, including cutting, hoisting fixing in position and applying a priming coat of approved steel primer all complete.(No dept. material, machine, manpower will supplied)	Structural steel work riveted, bolted or welded in built up sections, columns, trusses and framed work, including cutting, hoisting fixing in position and applying a priming coat of approved steel primer all complete.(No dept. material, machine, manpower will supplied) all steel materials shall conform to IS 2062, E250A and the make of all materials should be TATA/SAIL/JINDAL
16,17,18,19	There is no brand or make mentioned in the item description	Make or brand has to be mentioned as "TATA/SAIL/JSW Make"

For SAIL RITES Bengal Wagon Industry Pvt. Ltd.


03/01/2024.
(Navneet Kr. Jha)
DGM/Purchase